

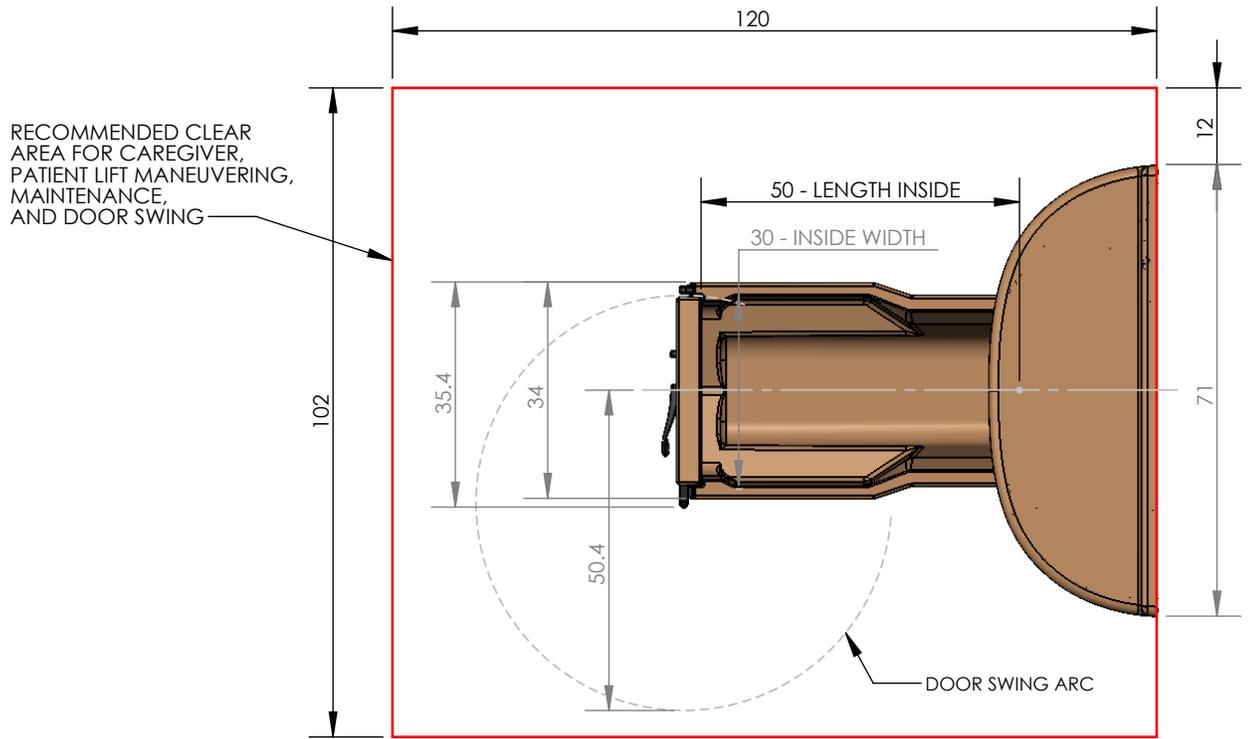


# CASCADE ELITE PREMIER END OPENING SPA

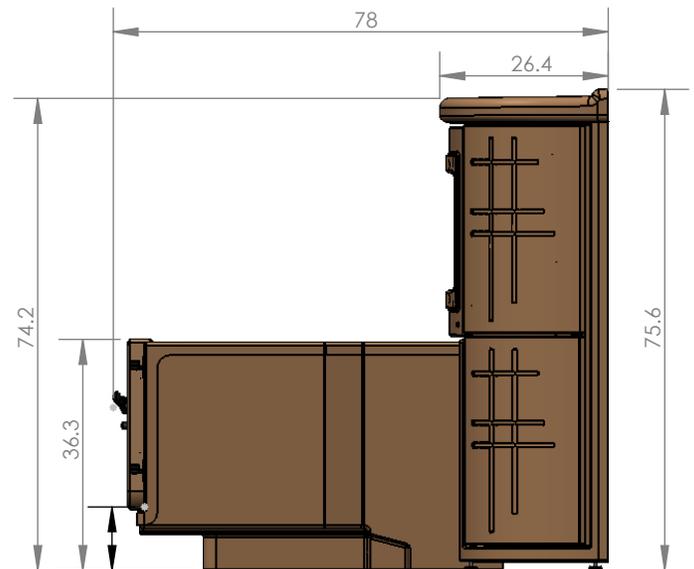

35 1/2 IN. MINIMUM DOOR OPENING WIDTH REQUIRED FOR TRANSPORTING TUB INTO THE ROOM.

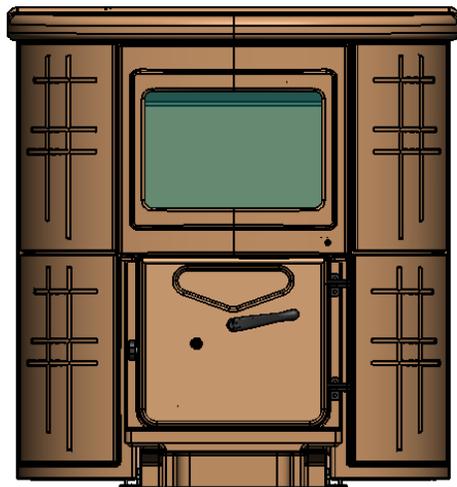

10 - DOOR THRESHOLD HT.

	RIGHT HAND (SHOWN)	LEFT HAND (MIRROR IMAGE)
MODEL NUMBER	360020-XEP	360020-XEPL
DESCRIPTION	CASCADE ELITE PREMIER	CASCADE ELITE PREMIER LEFT
"TUB TYPE" OPTION SELECTED	RIGHT HAND END OPENING (SHOWN)	LEFT HAND END OPENING (MIRROR IMAGE OF SHOWN TUB)
TUB WATER CAPACITY	100 GALLONS	100 GALLONS
RESERVOIR WATER CAPACITY	50 GALLONS	50 GALLONS
FILLED TUB WEIGHT	1258 LBS	1258 LBS
FILLED CABINET WEIGHT (RESERVOIR)	970 LBS	970 LBS
TUB ONLY WEIGHT	293 LBS	293 LBS
CABINET ONLY WEIGHT	415 LBS	415 LBS
TUB SHIPPING WEIGHT	395 LBS	395 LBS
CABINET SHIPPING WEIGHT	570 LBS	570 LBS


PENNER MFG INC.  
102 GRANT ST.  
AURORA, NE. 68818  
402-694-5003

THE "X" IN THE MODEL NUMBER REPRESENTS A COLOR CODE



12/15/11

# CASCADE ELITE PREMIER WITH SWIVEL LIFT SPA

RECOMMENDED CLEAR AREA FOR CAREGIVER, PATIENT LIFT MANEUVERING, MAINTENANCE, AND DOOR SWING

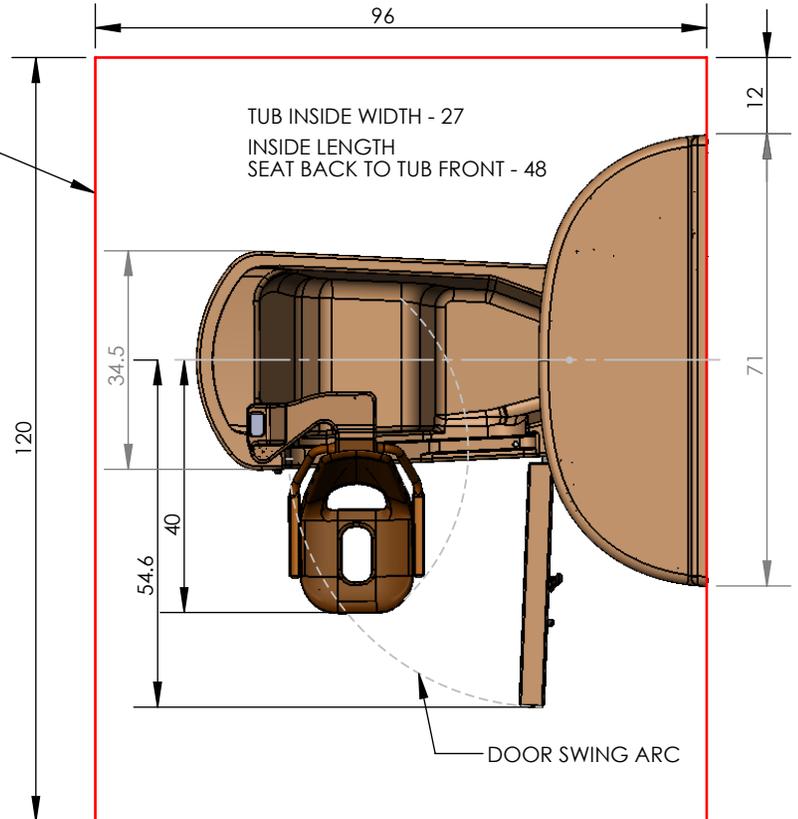

TO TRANSPORT THIS TUB INTO A ROOM, THE DOOR OPENING WIDTH MUST BE 35 INCHES MINIMUM.

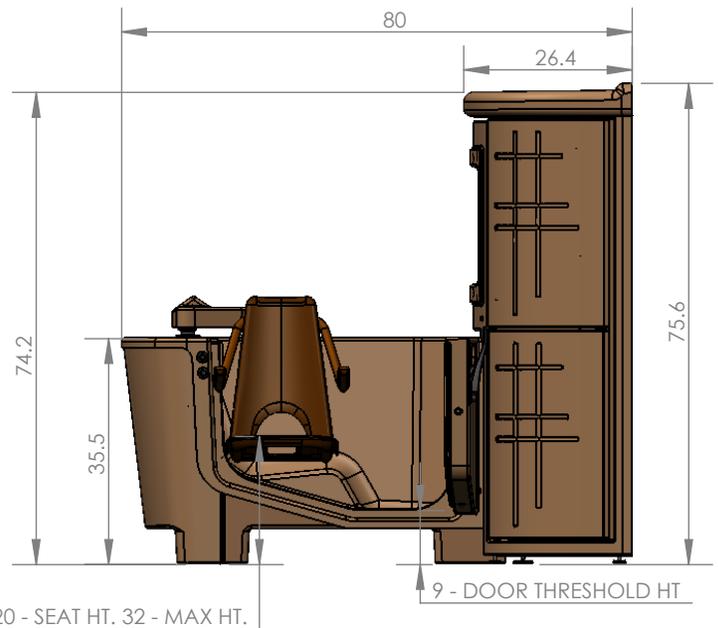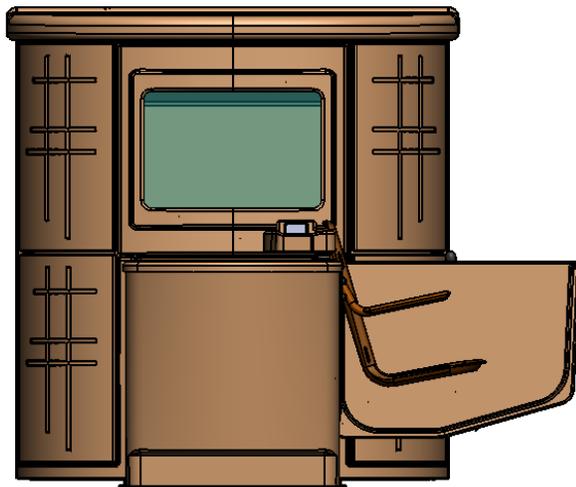

20 - SEAT HT. 32 - MAX HT.


9 - DOOR THRESHOLD HT

	RIGHT HAND (SHOWN)	LEFT HAND (MIRROR IMAGE)
MODEL NUMBER	360020-XEP	360020-XEPL
DESCRIPTION	CASCADE ELITE PREMIER	CASCADE ELITE PREMIER LEFT
"TUB TYPE" OPTION SELECTED	RIGHT HAND WITH SWIVEL LIFT (SHOWN)	LEFT HAND WITH SWIVEL LIFT (MIRROR IMAGE OF SHOWN TUB)
TUB WATER CAPACITY	80 GALLONS	80 GALLONS
RESERVOIR WATER CAPACITY	50 GALLONS	50 GALLONS
FILLED TUB WEIGHT	960 LBS	960 LBS
FILLED CABINET WEIGHT (RESERVOIR)	970 LBS	970 LBS
TUB ONLY WEIGHT	420 LBS	420 LBS
CABINET ONLY WEIGHT	415 LBS	415 LBS
TUB SHIPPING WEIGHT	530 LBS	530 LBS
CABINET SHIPPING WEIGHT	570 LBS	570 LBS



PENNER MFG INC.  
102 GRANT ST.  
AURORA, NE. 68818  
402-694-5003

# CASCADE ELITE PREMIER SIDE ENTRY SPA

RECOMMENDED CLEAR AREA FOR CAREGIVER, PATIENT LIFT MANEUVERING, MAINTENANCE, AND DOOR SWING

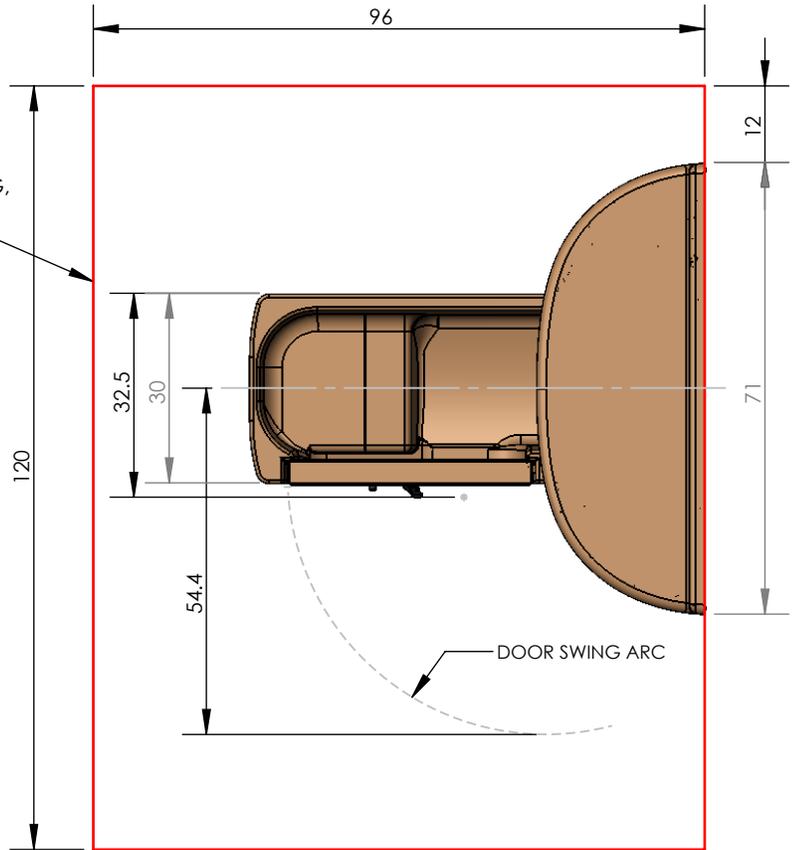

TO TRANSPORT THIS TUB INTO A ROOM, THE DOOR OPENING WIDTH MUST BE 33 INCHES. HOWEVER, IT CAN BE AS SMALL AS 30 INCHES IF THE WATER DOOR IS REMOVED FROM THE TUB PRIOR TO ENTRY.

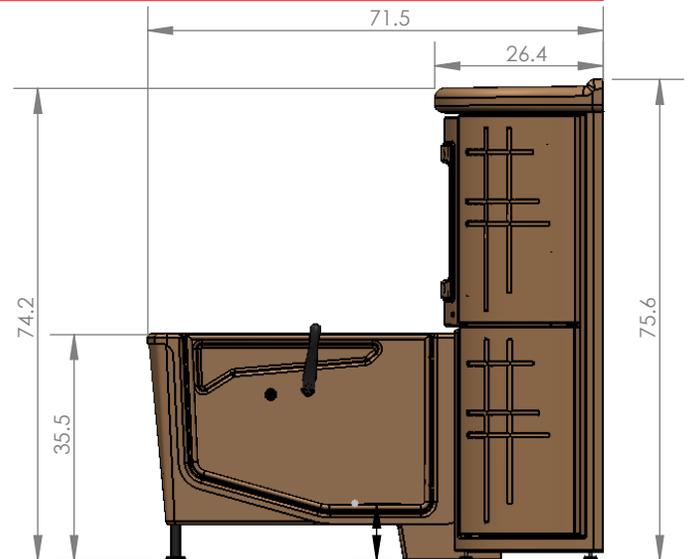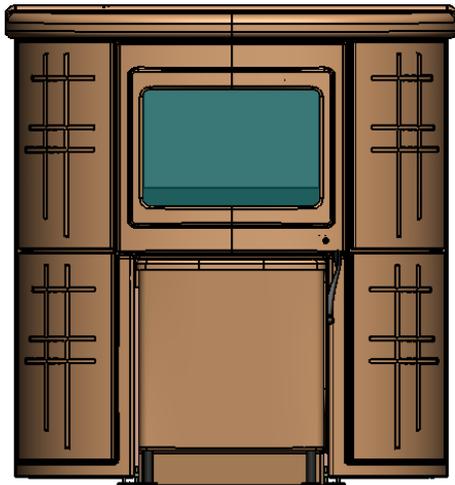


9 - DOOR THRESHOLD HT.

	RIGHT HAND (SHOWN)	LEFT HAND (MIRROR IMAGE)
MODEL NUMBER	360020-XEP	360020-XEPL
DESCRIPTION	CASCADE ELITE PREMIER	CASCADE ELITE PREMIER LEFT
"TUB TYPE" OPTION SELECTED	RIGHT SIDE ENTRY (SHOWN)	LEFT SIDE ENTRY (MIRROR IMAGE OF SHOWN TUB)
TUB WATER CAPACITY	80 GALLONS	80 GALLONS
RESERVOIR WATER CAPACITY	50 GALLONS	50 GALLONS
FILLED TUB WEIGHT	944 LBS	944 LBS
FILLED CABINET WEIGHT (RESERVOIR)	970 LBS	970 LBS
TUB ONLY WEIGHT	278 LBS	278 LBS
CABINET ONLY WEIGHT	415 LBS	415 LBS
TUB SHIPPING WEIGHT	380 LBS	380 LBS
CABINET SHIPPING WEIGHT	570 LBS	570 LBS

PENNER MFG INC.  
102 GRANT ST.  
AURORA, NE. 68818  
402-694-5003

ELECTRICAL JUNCTION BOX LOCATION AREA IS ON OPPOSITE SIDE OF CENTERLINE FOR LEFT HAND VERSIONS OF THE ELITE SYSTEMS.

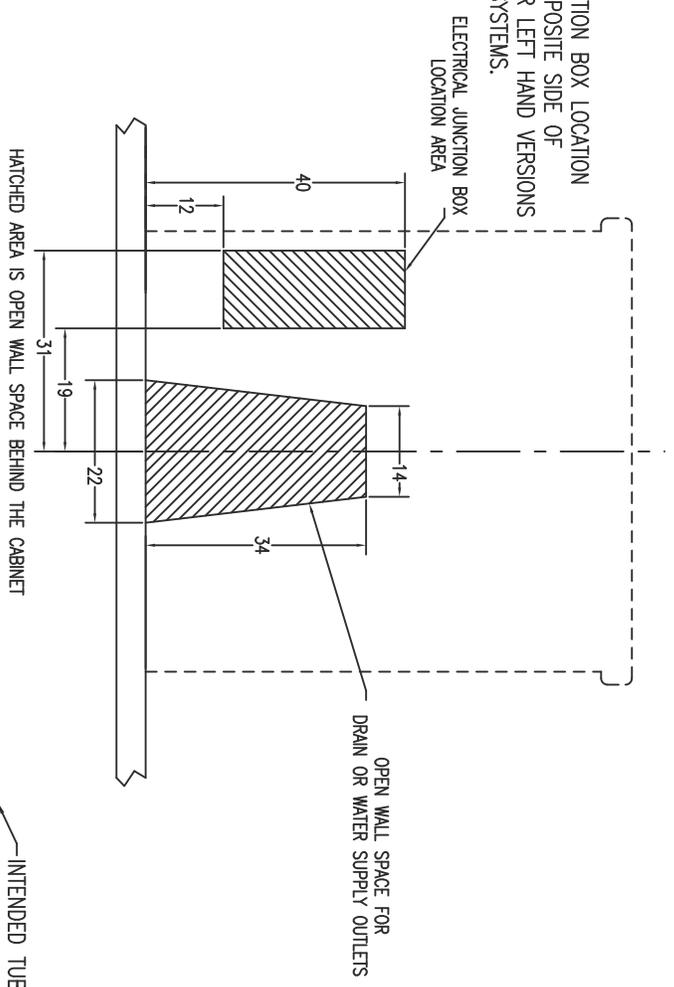

# PENNER MFG INC CASCADE – ELITE PREMIER TUB ROUGH IN SPECS

WATER SUPPLY:

3/4" HW & CW SUPPLY LINES PREFERRED WITH BALL VALVES W/MALE NPT THREADS (NOT SUPPLIED) (FLEXIBLE STAINLESS STEEL BRAIDED CONNECTING LINES SUPPLIED)


DRAIN PIPE FROM FLOOR OR OPTIONAL WALL LOCATION – 2" PVC (P-TRAP NOT SUPPLIED)

TUB ELECTRICAL:

TUB ELECTRICAL RATING: 120 VOLTS 9.5 AMPS  
RECOMMENDED ELECTRICAL SUPPLY: 20 AMP WITH GFCI PROTECTION (NUISANCE TRIPPING MAY OCCUR IF THE WIRING IS TOO LIGHT FOR THE DISTANCE BETWEEN THE BREAKER AND THE TUB.)

T.V. ELECTRICAL:

GFCI PROTECTED WALL RECEPTACLE – 120 VOLT – 15 AMP WITH GFCI PROTECTION (T.V. RATING IS APPROXIMATELY 2 AMPS)  
(THE NATIONAL ELECTRIC CODE REQUIRES THAT ALL WALL RECEPTACLES BE LOCATED OUTSIDE THE RESERVOIR CABINET)

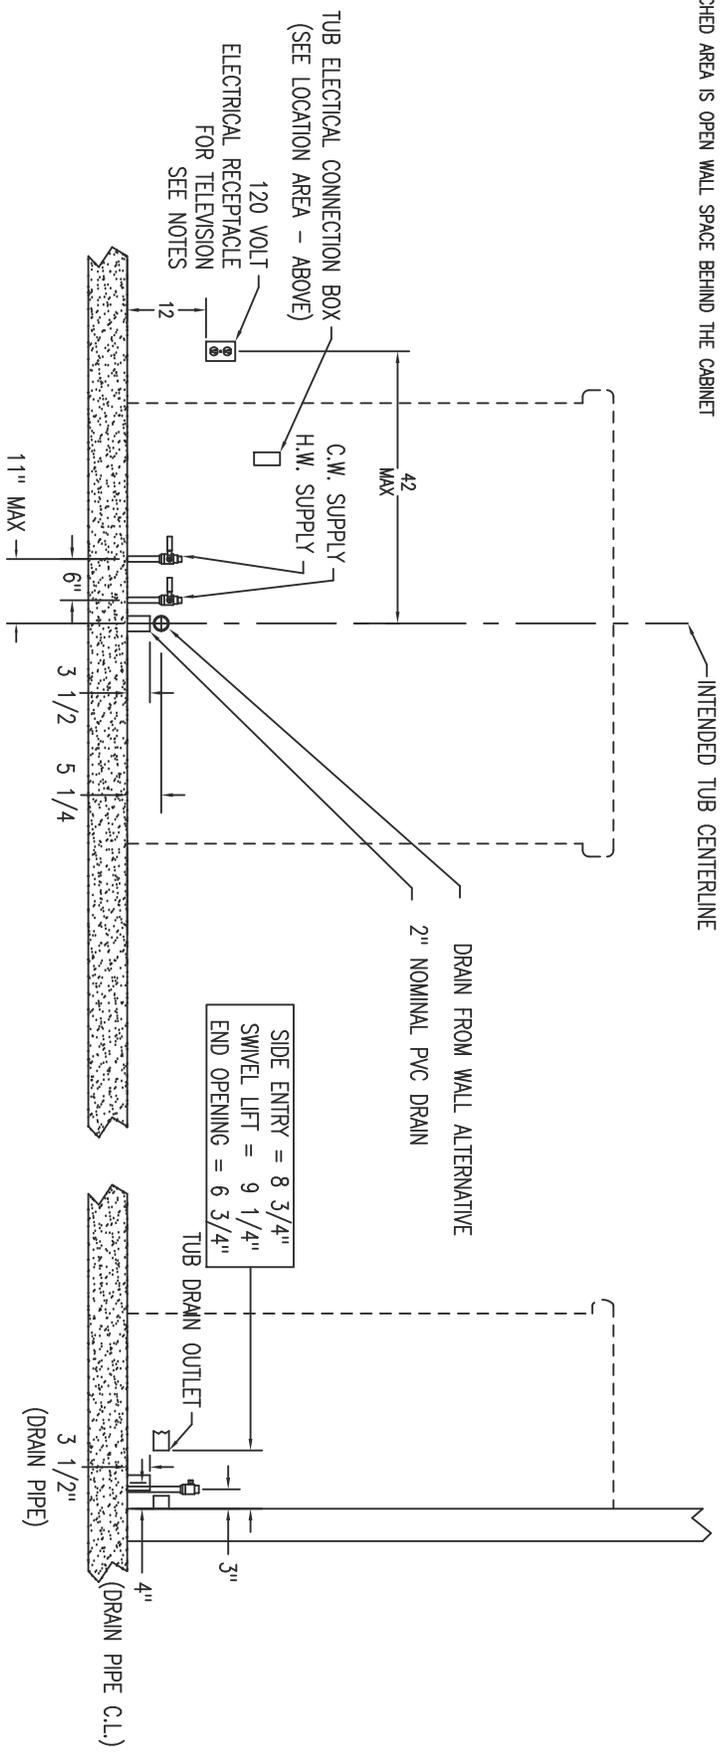

RECOMMENDED LOCATIONS